

Features

- 10MHz to 20GHz frequency range
- Low phase noise -99dBc/Hz -10kHz @ 20GHz
- Calibrated output power up to +17dBm
- Wide input voltage range: 5V~15Vdc @ 6W
- USB, Ethernet, TTL serial, interfaces.
- 12V POE (w/optional Ethernet adapter)
- External reference 5MHz to >100MHz
- Compact 3.2"x4.3"x0.485"



Electrical Specifications

Note: The 5019 is **NOT** USB powered. You may purchase a Valon **PS6V-1** power supply kit.

DC Input

Input Voltage Range Absolute Max Operational Max Operational Min Very low voltage operation Hardware Reset Threshold	+16V to -16V (reverse protected) +15v +4.5V (minimum voltage at the module power connector) +3.5V (synthesizer remains locked and serial port ok) 16V for >10sec resets the synthesizer to factory default settings
Input Power	5 Watts normal operation 500mW Standby (power down)
DC Input Connector	Hirose DF3A-2P-2DS Mates with Hirose DF3-2S-2C plug and pre-crimped wire H2BXT-10112-R4 (red) and H2BXT-10112-B4 (black). 20" dc cables supplied with synthesizer, additional cables available.

RF Synthesizer Specifications

Frequency Range	10MHz to 20GHz
Frequency Increment	1Hz for frequency less than 4294.967MHz 10 Hz for frequency greater than 4294.967MHz 20Hz for frequency greater than 15GHz
Frequency Lock Time	<400uS Lock time is from the time the frequency command is sent, or a frequency step in sweep mode, or input from User Port in List mode to a stable Lock Detector output.

Phase Noise	Typical phase noise (+6dB max.) *Note that phase noise at <100Hz offset can be improved typically > 15dB with external high stability reference.							
	10Hz	100Hz	1kHz	10kHz	100kHz	1MHz	10MHz	
0.5GHz	-75	-90	-118	-130	-132	-143	-155	dBc/Hz
1GHz	-70	-84	-114	-125	-127	-138	-150	dBc/Hz
2GHz	-61	-77	-108	-118	-122	-132	-150	dBc/Hz
3GHz	-58	-78	-105	-116	-120	-127	-148	dBc/Hz
4GHz	-53	-74	-102	-114	-117	-126	-144	dBc/Hz
6GHz	-50	-70	-98	-109	-112	-121	-142	dBc/Hz
8GHz	-51	-70	-95	-105	-108	-120	-141	dBc/Hz
10GHz	-50	-68	-94	-104	-107	-120	-140	dBc/Hz
13GHz	-40	-68	-91	-102	-106	-112	-134	dBc/Hz
15GHz	-35	-66	-90	-101	-104	-112	-133	dBc/Hz
17GHz	-30	-64	-88	-99	-102	-110	-130	dBc/Hz
20GHz	-30	-64	-88	-99	-101	-110	-130	dBc/Hz
Harmonics	The 5015 /5019 output waveform is a clipped sine wave. Odd harmonics are typically <-12dBc, even harmonics are typically <-20dBc.							
Sub Harmonics	Sub harmonics(f/2 and f/4) are typically <-50dBc for output frequencies up to 15GHz .Sub harmonics (f/2)are typically <-15dBc for output frequencies from 15GHz to 20GHz.							
Spurious	Non-Harmonic spurious typically <-60dBc including fraction-N spurs and boundary spurs. The 5015/5019 also has four user selectable spur reduction modes. See section 6.10.4.							
Output Return loss	Min.(dB)		Typical(dB)					
10~ 100MHz	>6		10dB					
50MHz ~ 10GHz	>10		12					
10GHz ~ 15GHz	>6		8					
15GHz ~19GHz	>8		12					
RF Connectors	SMA Female							

RF Output Power Range	Max dBm	Typical Max dBm	Min dBm	
10MHz ~ 100MHz	>+12	+17	<-30	
100MHz ~5GHz	>+16	+18	<-30	
5GHz ~ 10GHz	>+15	+16	<-30	
10GHz ~ 15GHz	>+14	+15	<-30	
15GHz~20GHz	>+14	+16	<-30	
RF Output Power Accuracy				
1GHz~15GHz	±0.7dBm +10dBm ~ -20dBm and ±0.9dBm > +10dBm or <-20dBm			
15GHz ~ 20GHz	±1.0dBm +10dBm ~ -20dBm and ±1.5dBm > +10dBm or <-20dBm			
RF Output Power Resolution	<0.01dB			

Reference Frequency

Internal Reference	10.000MHz
Frequency	± 2ppm (23°C) can be zeroed with reference trim command
Initial Accuracy	±0.5ppm -20°C to +70°C (case temp)
Temperature Stability	± 10ppm
Reference Trim Range	0.02ppm
Reference Trim Resolution	
External Reference	50Ω nominal impedance
Frequency Range	5MHz to 100MHz, typical max 120MHz
Input power range	-10dBm min. to +13dBm max.
External Reference Connector	SMA Female 50Ω nominal impedance Note: Ext input is ac coupled to synthesizer but dc coupled to internal VCTCXO control circuit. See Operations Manual for details.
EFC	Pulling range >±10ppm
Electronic frequency Control at external reference input	Voltage ±3V Input resistance 20kΩ Frequency response 0Hz~>5kHz

Interface

USB	Micro-B socket FTDI virtual com port 9600, 8, N,1,N default, see selectable baud rates below See FTDI for drivers for your computer. Note: The Configuration Manager GUI will automatically configure the USB port and switch to 115200 baud rate.
Ethernet	10BASE-T/100BASE-TX compliant with IEEE 802.3. 8-pin Hirose 2mm connector or optional external RJ-45 module and cable adapter.
USER PORT	3.3V TTL TXD & RXD serial, 5-bit List Mode parallel, Sweep trigger in, Sweep step out, Sweep enable out. All 3.3V TTL Hi-Z input, 200 ohm output. Optional SPI control with SCL MISO MOSI SEL (custom available on request) Lock detect output. Connector: Hirose DF11-8DP-2DS Mates with Hirose DF11-8DS-2C plug and pre-crimped Wire H3BXT-10112-** (Digi-Key) LMS-2 LIST Mode switch and cable accessory is also available.
Selectable Baud Rates	USB, serial TTL: 9600, 19200, 38400, 57600,115200, 230400, 460800, 921600


Environmental

Operational full specifications:	-0°C~+60°C (case temperature, heat sink required)
No damage functional:	-20°C~+70°C (case temperature)
Humidity:	5%~95% minimal condensation allowed
IP rating:	50 No water protection.

Mechanical Dimensions

3.2"x 4.3"L x 0.485"

Weight: 0.37lbs, 165g Material: AL-6061-T6
Finish: Clear Alodine (conductive)

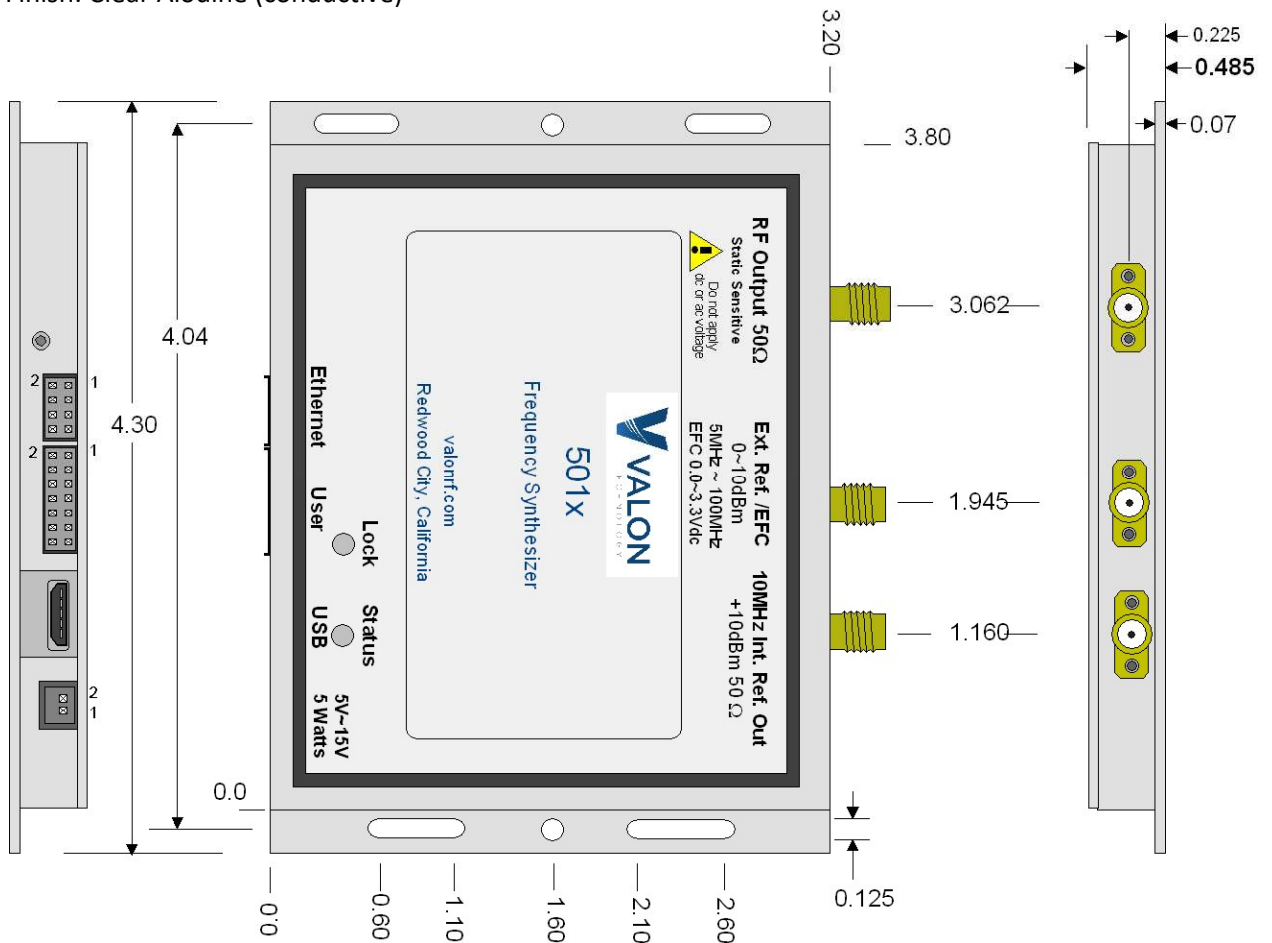

Available Accessories:

- ETH-1 Ethernet Adapter
- ETH-2 PoE 12V Injector
- PS6V-1 Power Supply Kit
- LMS-2 List Mode Selector Switch and Cable Assembly

Visit 5015/5019 Accessory page at www.ValonRF.com for details and pricing.